


HAZARDOUS LOCATION  
 IQ3000T, IQ4000T, IQ5000T, IQ6000T SPEC DRAWING REV 5

**IQ3000T**  
 COOLING CAPACITY: 3000 BTUH @125°F  
 MAXIMUM AMPS 7.6 @ 120V 60HZ  
 MAXIMUM AMPS 3.8 @ 230V 60HZ  
 MAX. OPERATING TEMP. 125°F  
 DIMENSIONS: 12.06"H X 19.94"W X 19.94"D  
 WEIGHT 95 LBS

**IQ5000T**  
 COOLING CAPACITY: 5000 BTUH @125°F  
 MAXIMUM AMPS 8.3 @ 120V 60HZ  
 MAXIMUM AMPS 4.2 @ 230V 60HZ  
 MAX. OPERATING TEMP. 125°F  
 DIMENSIONS: 12.06"H X 19.94"W X 19.94"D  
 WEIGHT 95 LBS

**IQ4000T**  
 COOLING CAPACITY: 4000 BTUH @125°F  
 MAXIMUM AMPS 8.2 @ 120V 60HZ  
 MAXIMUM AMPS 4.1 @ 230V 60HZ  
 MAX. OPERATING TEMP. 125°F  
 DIMENSIONS: 12.06"H X 19.94"W X 19.94"D  
 WEIGHT 95 LBS

**IQ6000T**  
 COOLING CAPACITY: 6000 BTUH @125°F  
 MAXIMUM AMPS 9.1 @ 120V 60HZ  
 MAXIMUM AMPS 4.6 @ 230V 60HZ  
 MAX. OPERATING TEMP. 125°F  
 DIMENSIONS: 12.06"H X 19.94"W X 19.94"D  
 WEIGHT 95 LBS

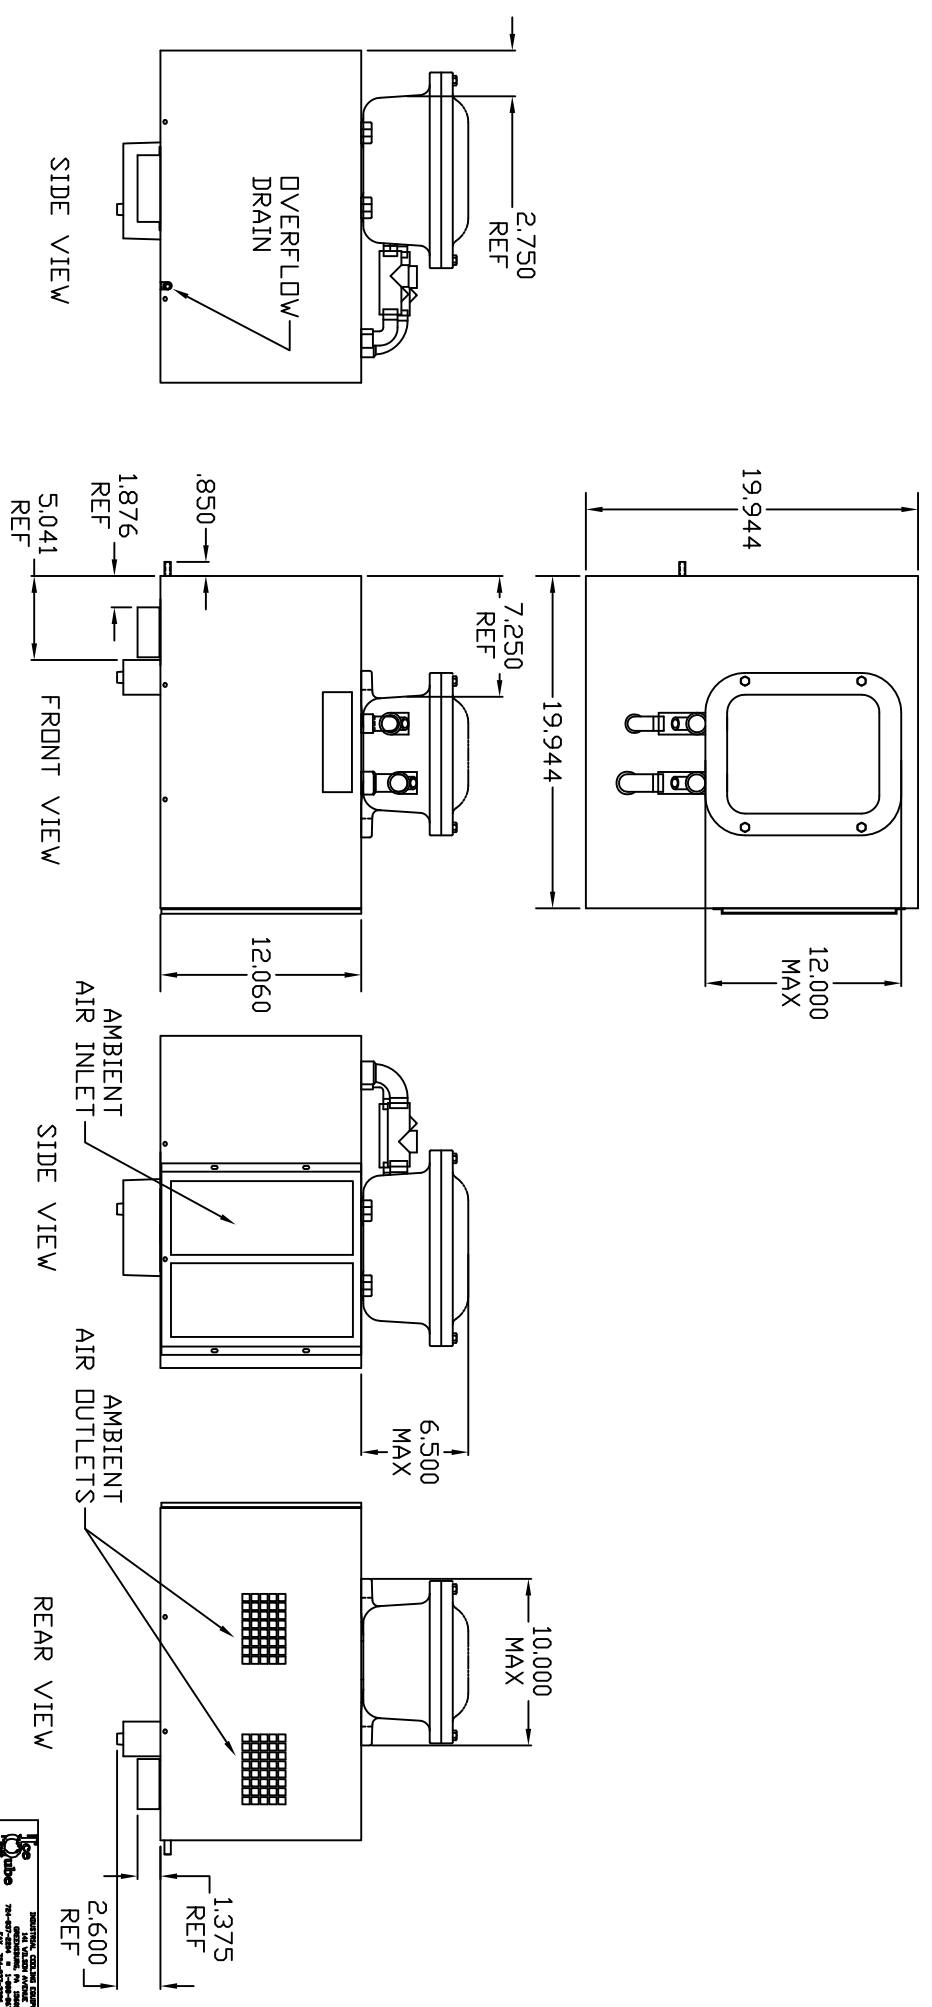

PROPRIETARY DRAWING	DATE	REV	DESCRIPTION
2-18-08			
SHEET 2 OF 2			
IQ3-4-5-6000T			
IQ280204			
5			

