
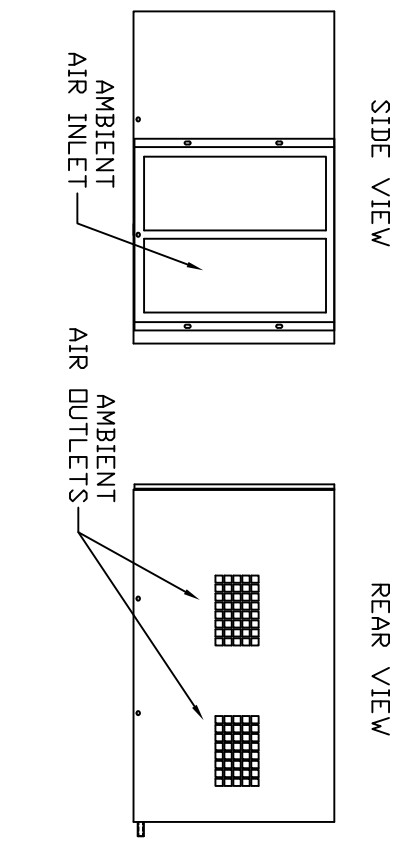
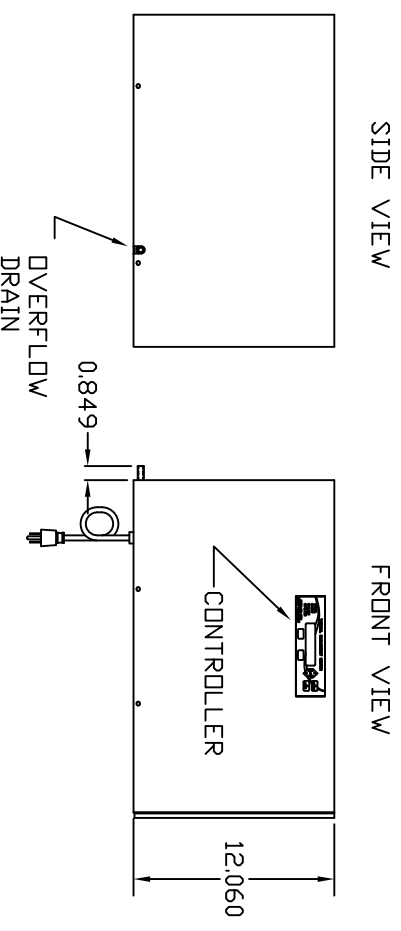


IQ3000T
 COOLING CAPACITY: 3000 BTUH @131°F
 MAXIMUM AMPS 7.6 @ 120VAC/60HZ
 MAXIMUM AMPS 3.8/4.2 @230/220 V 60/50HZ
 MAX. OPERATING TEMP, 131°F
 DIMENSIONS: 12.06"H X 19.94"W X 19.94"D
 WEIGHT 75 LBS


IQ4000T
 COOLING CAPACITY: 4000 BTUH @131°F
 MAXIMUM AMPS 8.2 @ 120VAC/60HZ
 MAXIMUM AMPS 4.1/4.6 @230/220 V 60/50HZ
 MAX. OPERATING TEMP, 131°F
 DIMENSIONS: 12.06"H X 19.94"W X 19.94"D
 WEIGHT 75 LBS

IQ5000T
 COOLING CAPACITY: 5000 BTUH @131°F
 MAXIMUM AMPS 8.3 @ 120VAC/60HZ
 MAXIMUM AMPS 4.2/4.7 @230/220 V 60/50HZ
 MAX. OPERATING TEMP, 131°F
 DIMENSIONS: 12.06"H X 19.94"W X 19.94"D
 WEIGHT 75 LBS


IQ6000T
 COOLING CAPACITY: 6000 BTUH @131°F
 MAXIMUM AMPS 9.1 @ 120VAC/60HZ
 MAXIMUM AMPS 4.6/5.1 @230/220 V 60/50HZ
 MAX. OPERATING TEMP, 131°F
 DIMENSIONS: 12.06"H X 19.94"W X 19.94"D
 WEIGHT 75 LBS

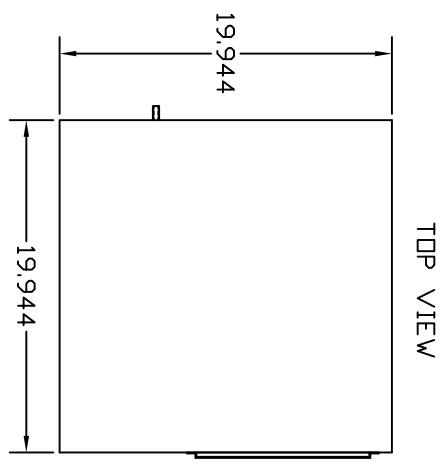


PROPRIETARY DRAWING		DATE	SCALE
12-07-07			
SHEET 2 OF 2			
IQ3-4-5-6000T		MANUFACTURED IN THE UNITED STATES OF AMERICA MADE IN CHINA	
IQ280222		5	

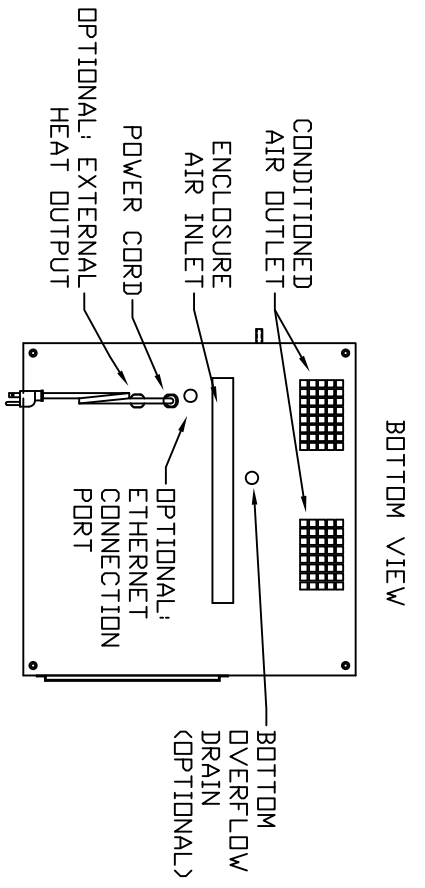

IQ3-4-5-6000T
CUTOUT DRAWING

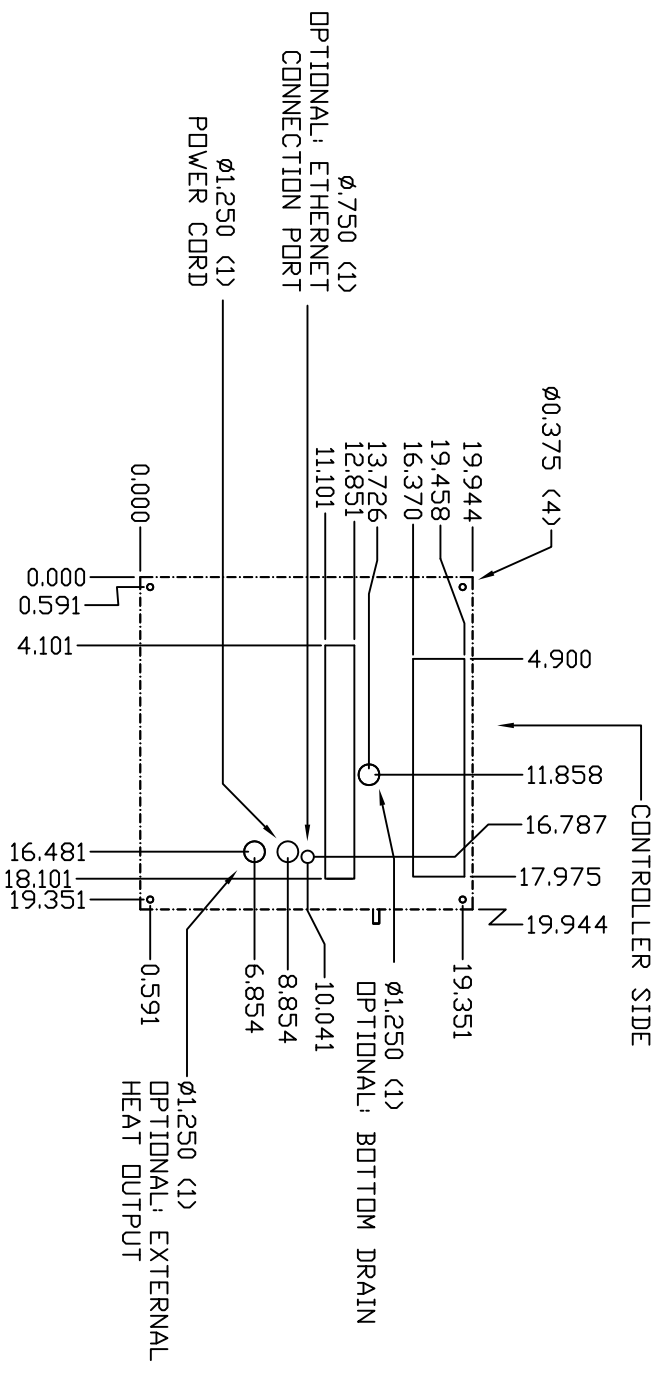

GASKET
DRAWING

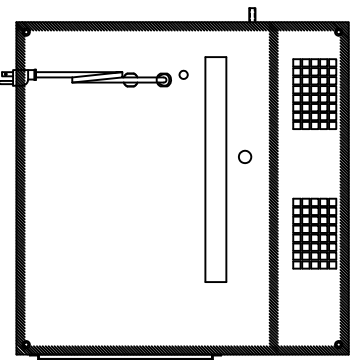

IMPORTANT
GASKET MUST BE
APPLIED AS SHOWN
FOR PROPER OPERATION
AND TO MAINTAIN
NEMA INTEGRITY

REV	DESCRIPTION	DATE	CHECKED
4	CHANGED POWER CORD & END CALLOUT	2-16-10	JHM
3	ADDED NOTE: CNTRL. SIDE, UPDATE AMPS & TEMPS	12-27-07	JHM
2	ADDED DRAWING NUMBER & TITLE BLOCK	12-27-07	JHM
1	CHANGED END INITIAL RELEASE	3-29-09	JHM
0	INITIAL RELEASE	3-29-09	JHM
	DESCRIPTION	DATE	CHECKED
	REVISIONS		

PROPRIETARY DRAWING
DATE: 12-07-07
SHEET 1 OF 2

1000
IQ3-4-5-6000T
10280222 4